



S.A COMPOSITE HOSE SUPPLIERS cc

COMPOSITE HOSE AND COMPONENT MANUFACTURERS

CFX 2060 – SUPER LIGHTWEIGHT ALUMINIUM COMPOSITE HOSE FOR PETROLEUM – GRAVITY FEED

This hose is commonly used as a road tanker off-loading hose and in some cases as in-plant transfer hose. It is recommended for use with most petroleum based products with a aromatic hydro carbon content of up to 100%. This hose is lightweight with Aluminum wire.

Handle up to 300kpa

Composite hoses are not supplied unfitted.
End fittings are secured
by means of external swaging
and crimping.


CONSTRUCTION

- **Inner Wire:**
Alloy Aluminium.
- **Reinforcement:**
Multiple piles of polypropylene film and polypropylene fabric.
- **Cover:**
Blue pvc with grey identification stripe.
- **Outer Wire:**
Galvanised Steel / Alloy Aluminium
(Subject to Customer's Quotation)
- **Temperature Range:** +30° C to +70° C



CFX 2060
LIGHTWEIGHT
COMPOSITE
HOSE

— SINCE 2003 —

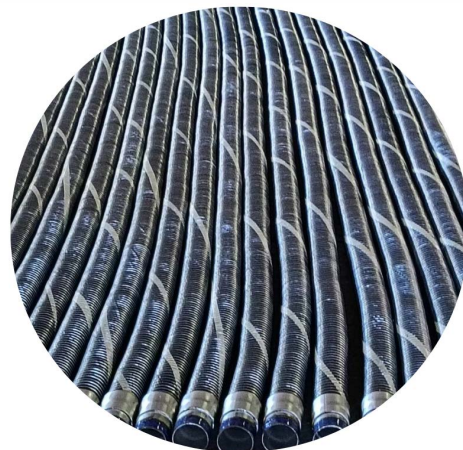

S.A COMPOSITE
HOSE SUPPLIERS cc

011 762 1301

www.sacomp.co.za

Size Nominal	Size Actual	Bend Radius	Weight/Meter	Maximum Length
80NB	76.20 mm	240 mm	3.25 kg/m	20 met
100NB	101.60 mm	360 mm	5.10 kg/m	20 met

More sizes available on customer request.

Copyright S.A Composite Hose Suppliers cc