

# S.A COMPOSITE HOSE SUPPLIERS cc

COMPOSITE HOSE AND COMPONENT MANUFACTURERS


## CFX 2500 - BUNKERING COMPOSITE HOSE 1400 KPA

This hose was designed for ship to shore bunkering operations, where a robust and mechanically strong hose is required at a higher operating pressure.

Composite hose are not supplied unfitted. End fittings are secured by means of external swaging and crimping.

### CONSTRUCTION

- **Inner Wire:**  
Galvanised Steel or S/Steel Wire (Grade 304)  
(Subject to Customer's Quotation)
- **Reinforcement:**  
Multiple piles of polypropylene film and polypropylene fabric.
- **Cover:**  
Blue pvc with double green identification stripe.
- **Outer Wire:**  
Galvanised Steel or S/Steel Wire (Grade 304)  
(Subject to Customer's Quotation)
- **Temperature Range:**  $\pm 30^{\circ}\text{C}$  to  $\pm 70^{\circ}\text{C}$

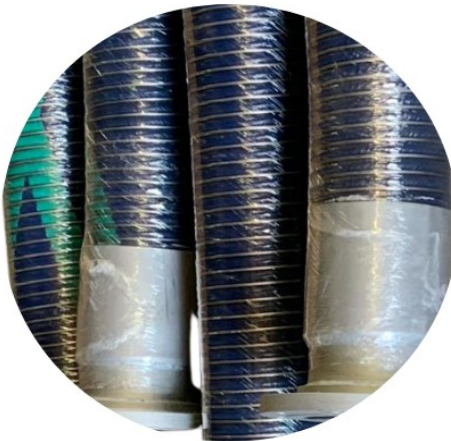

CFX 2500  
BUNKERING  
COMPOSITE HOSE

SINCE 2003



Customer must request Grade 316 Wire if required,  
all hoses are manufactured with Grade 304 S/Steel Wire

Size Nominal	Size Actual	Bend Radius	Weight/Meter	Maximum Length
80NB	76.20 mm	240 mm	3.25 kg/m	20 met
100NB	101.60 mm	360 mm	5.10 kg/m	20 met
150NB	152.40 mm	460 mm	8.40 kg/m	10 met